


# QF 131™

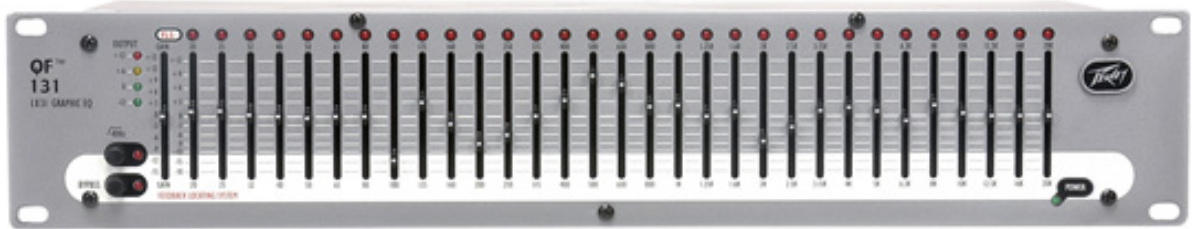

## OVERVIEW

The QF family features one dual-channel model and one single-channel unit, all incorporating Peavey's legendary low-noise, low-distortion design. Ruggedly constructed, QF Series EQs have 45 mm, center-detented control sliders enclosed in metal for durability. These two rack-space units also offer  $\pm 15$  dB gain control and an LED display indicating output level. Other shared features include switchable low-cut filters, +21 dBu balanced inputs and outputs, and bypass switches. QF Series equalizer filters are set at ISO center frequencies within 3% accuracy. Whether on stage, in the studio, or simply tweaking your home hi-fi system, the QF Series has an EQ for you.

## FEATURES

- 31-band graphic EQ with +12 dB boost/-18 dB cut per band
- 1/3 octave filter sets
- Constant Q filters
- Output level LEDs (-12 to +24 dB)
- 18 dB per octave 40 Hz low-cut filter with status LED
- 20 Hz to 20 kHz effective EQ range
- XLR and 1/4 inch TRS inputs/outputs for balanced or unbalanced operation
- Bypass switch with status LED
- New improved FLS® circuitry for greater sensitivity
- Weight Unpacked: 9.00 lb(4.082 kg)
- Weight Packed: 11.00 lb(4.989 kg)
- Width Packed: 6.12"(15.5448 cm)
- Height Packed: 22.25"(56.515 cm)
- Depth Packed: 10.25"(26.035 cm)