



SHOW12

Loudspeaker System
扬声器系统

Product
Specifications
产品说明书



SPECIFICATIONS

SHOW12

The new SHOW 2-way enclosure series features high power ratings with custom components, a sleek look and a unique, recessed metal grille. The SHOW12 is a 2-way system, 1.7" diaphragm horn-loaded tweeter and one high-performance 12" woofer. It is rated at 400 Watts continuous and 1600 Watts peak. This lightweight speaker system is ideal for smaller venues where space is at a premium. Connections include one NL4 four-pin twist-lock jack.

The SHOW Series is available in black.

FEATURES:

- Two-way sound reinforcement enclosure
- Designed for permanent installations
- Premium 12" woofer
- 1.7" diaphragm horn-loaded tweeter
- The badge is rotatable
- Available in black

SPECIFICATION:

- Type: Two-way passive crossover speaker system
 - Continuous power: 400W
 - Program power: 800W
 - Peak power: 1600W
- Impedance: 8 OHMS
- Sensitivity (1W@1m): 96 dB
- Maximum sound pressure level (1 meter): 122 dB @400W (128 dB @1600W Peak)
- Frequency response, 1 meter on-axis, swept-sine in anechoic environment:
 - 46 Hz—21 kHz, -10 dB
- Nominal coverage pattern (-6 dB): 90° H×60° V
- Transducer complement: 1 x 1.7" (44mm VC) diaphragm, 1" exit
 - 1 x 12" woofer (65mm VC)
- Input connections: NL4 4-pin jack × 1 PIN 1+ = (+) POSITIVE, PIN 1- = (-) NEGATIVE
PIN 2+ and PIN 2-, NC
- Material: 15mm (0.6") MDF
- Surface treatment: Black textured polyester paint
- Dimensions: H 605mm x W 365 mm x D 390mm
 - H 23.82" x W 14.37" x D 15.35"
- Packing size: H 680mm x W 460mm x D 440mm
 - H 26.77" x W 18.11" x D 17.32"
- Net Weight: 22.5kg (49.6 lbs.)

Flying or Mounting the SHOW Enclosure

CAUTION: Before attempting to suspend this speaker, consult with a certified structural engineer. Speaker can fall from improper suspension, resulting in serious injury and property damage. Do not suspend or mount any other product or device from this enclosure! Use only the correct mating hardware. All associated rigging is the responsibility of others. Maximum enclosure angle 30 degrees.

Failure to follow proper rigging specifications listed in the manual may result in injury or death.

Whenever possible, in addition to the nominal primary mounting method, use a suitable safety chain or wire rope attached to one of the other groups of fly point inserts, and firmly attached to a suitable structural member as indicated by a certified structural engineer.

CAUTION: ALWAYS USE SAFETY CHAIN.

We recommend the use of Thread-locker at the insert point bolts, so the bolts cannot vibrate loose. Never transport the cabinet using the array bracket or other mounting brackets as a structural member, while the cabinet is mounted on an array bracket or other mounting bracket and unsupported otherwise, as this may unduly stress the mounting inserts.

INSPECT RIGGING ANNUALLY .

This Peavey loudspeaker should be suspended overhead only in accordance with the procedures and limitations specified in the User's Manual and possible manual update notices. This system should be suspended with certified rigging hardware by an authorized rigging professional and in compliance with local, provincial and national suspension ordinances or regulations..

DO NOT OVER TORQUE HARDWARE.

INSTALLATION

 The Nineteen M8 1.25 mm per thread threaded mounting suspension points (5 top , 3 bottom, 4 each both sides, and 3 rear) are provided. These are plugged with a hex key beveled head bolt.


The nineteen mounting suspension points are for use with forged shoulder machinery eyebolts and should be an M8 size, 1.25 mm per thread, and must conform to at least DIN 580 or ASTM A489, or whatever local, provincial or national suspension ordinances or regulations may additionally require. Eyebolts must be used in groups of 3 or 4, never use just one or two eyebolts to hang the speaker overhead.

ALWAYS USE PROPER GRADE HARDWARE.


System Specifications

The loudspeaker system shall have an operating bandwidth of 46Hz-21kHz +/-10dB, input sensitivity shall be 96dB 1w/1m, nominal impedance should be 8 Ohms, rated AES power shall be 400W, maximum program power of 800W (minimum amplifier of 3dB). The outside dimension shall be 23.82" height, 14.37" width, 15.35" depth, weight shall be 49.6 lbs., the loudspeaker system shall be a Peavey® model SHOW12.

Input Plate

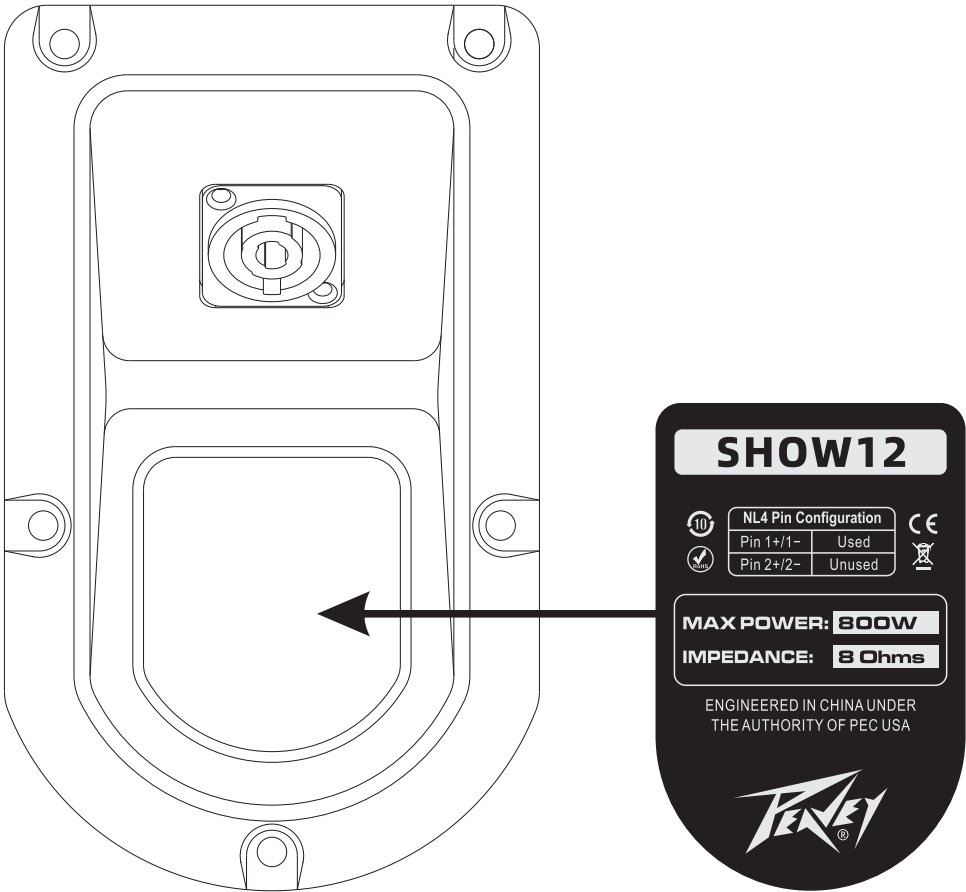

Dimensions:
Unit: mm

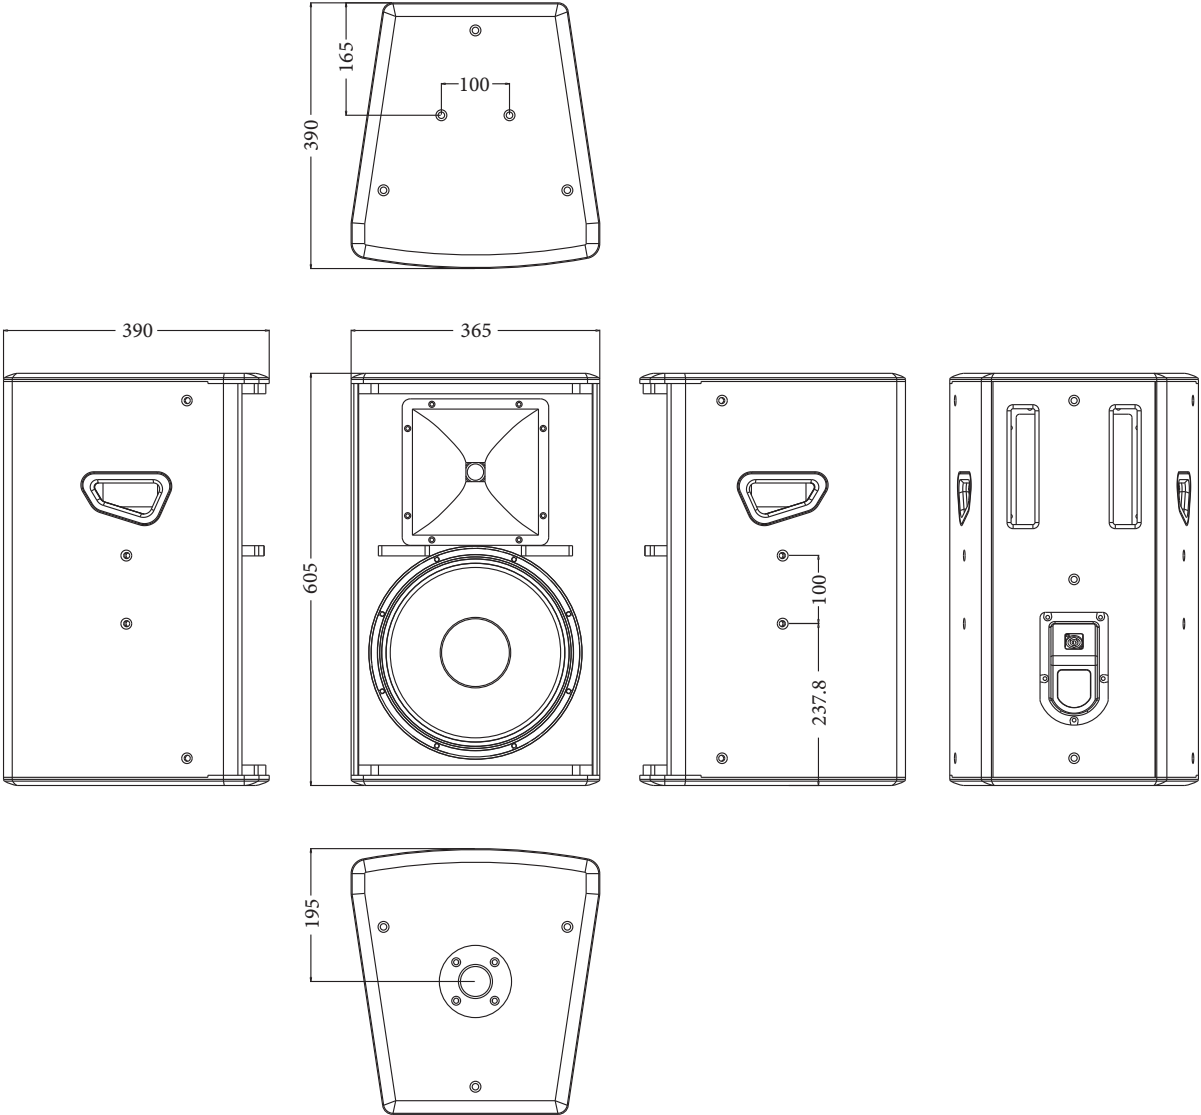

产品规格

SHOW12

全新的SHOW两分频系列扬声器具有高的额定功率值, 定制组件, 时尚的外观和独特的嵌入式网罩。SHOW12是两分频系统, 1.7"音圈高音单元和12"高性能低音单元。额定连续功率为400W, 峰值功率1600W。这种轻巧的扬声器系统非常适合空间有限的小型场所。连接包括一个NL4四脚插座。SHOW系列提供黑色外观可选。

特点

- 两分频扩声扬声器
- 固定安装
- 12"优质低音单元
- 1.7"音圈高音单元
- 标牌可以旋转
- 颜色: 黑色

技术参数

- 系统类型: 两分频被动式扬声器系统
 - 持续功率: 400W
 - 音乐功率: 800W
 - 峰值功率: 1600W
- 阻抗: 8 OHMS
- 灵敏度 (1W@1m): 96dB
- 最大声压级(1米): 122dB@400W (128dB@1600W 峰值)
- 频率响应: 46Hz—21kHz, -10dB
- 覆盖角 (-6dB): 90° H × 60° V
- 换能器配置: 1 x 1.7" 高频驱动器 (44mm 音圈), 1" 喉口
1 x 12" 低频驱动器 (65mm 音圈)
- 输入连接器: NL4 4-pin jack × 1 PIN 1+ = (+) 正极, PIN 1- = (-) 负极
PIN 2+ and PIN 2-, 悬空
- 箱体材质: 15mm (0.6") 优质中纤板
- 表面处理: 环保黑色水性漆
- 产品尺寸: H 605mm x W 365mm x D 390mm
H 23.82" x W 14.37" x D 15.35"
- 包装尺寸: H 680mm x W 460mm x D 440mm
H 26.77" x W 18.11" x D 17.32"
- 净重: 22.5kg (49.6 lbs.)

吊挂或安装SHOW系列音箱



注意: 在试图吊挂该扬声器之前，请咨询有资质认证的结构工程师。扬声器可能会因吊挂不正确而掉落，从而会导致严重的人身伤害和财产损失。不要在该产品箱体上吊挂或安装任何其他产品或设备！只能使用正确配套的五金硬件。所有相关的索具都是他人的责任。

音箱最大吊装角度为30度。

未能遵循手册中列出的正确索具规范可能会导致受伤或者死亡。

尽可能除了标准的主要安装方法外，还应使用适合的安全链或钢丝绳连接到音箱其他一组吊挂点上，并按照有资质的结构工程师的指示牢固地连接到合适的结构件上。

注意：始终使用安全链。

我们建议使用螺纹胶在插入的螺栓处，防止螺栓松动。在将箱体安装在阵列支架或其他安装支架上且没有其他支撑的状态下，切勿使用阵列支架或其他安装支架作为结构部件搬运箱体。因为这可能会对安装插入件造成过度的承受压力。

每年检查索具。

Peavey® 扬声器只能根据产品说明书中规定的步骤及限定的参数和可能的手册更新通知将扬声器悬挂到高于头顶位置。该系统应由经过授权的索具专业人士使用经过认证的索具硬件进行悬挂，并遵守地方，省或国家的悬挂安装条例。

不要过度扭矩硬件。

安装


该系统共提供19个1.25 mm螺纹M8尺寸安装吊挂点（顶部5个，底部3个，两侧各4个，背面3个）。这些装入的是六角螺栓。

19个安装悬挂点与锻造肩部机械吊环螺栓一起使用，应该是M8尺寸，每根螺纹1.25毫米，并且必须至少符合DIN 580或ASTM A489，**或任何地方、省或国家**悬挂条例或法规的要求。吊环必须以3个或4个为一组来使用，切勿只用1个或2个吊环螺栓把扬声器挂在头顶上。始终使用适当等级的硬件。

系统规格


扬声器系统的工作频带应为46Hz-21kHz, ± 10 dB; 输入灵敏度为96dB (1W/1m) 标称阻抗为8欧姆 AES额定功率为400W, 最大节目功率为800W (放大器最小余量3dB)。外部尺寸为高23.82英寸、宽14.37英寸、深15.35英寸, 重量为49.6磅。扬声器系统型号为Peavey® SH0W12。

输入面板

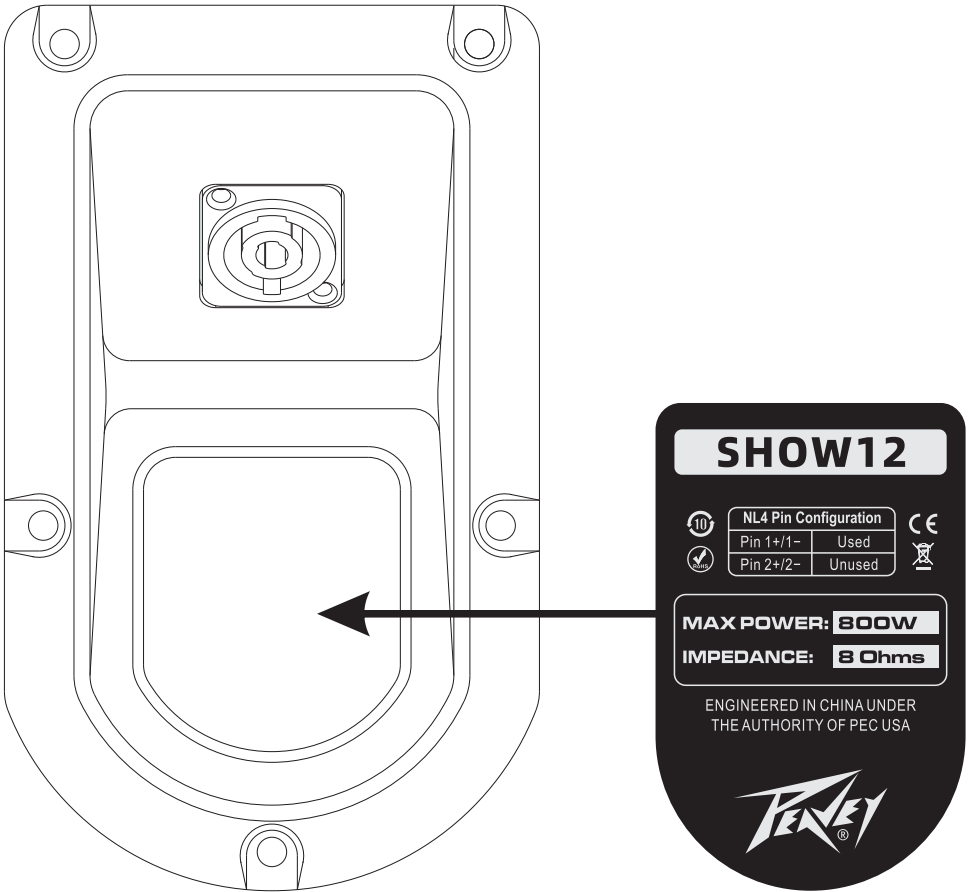

尺寸

单位：mm

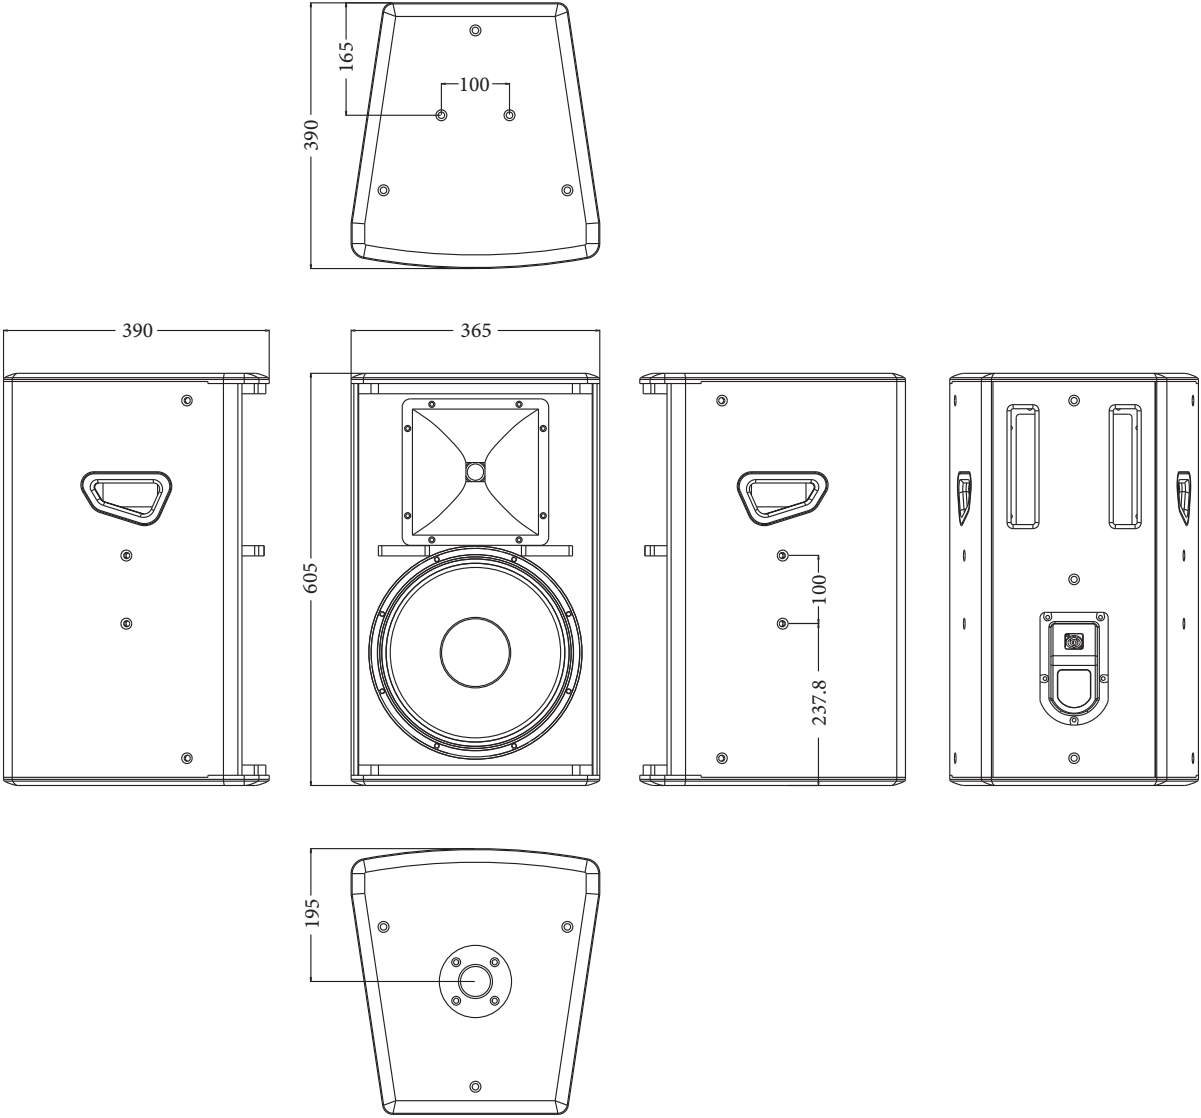



www.peavey.com.cn

Warranty registration and information for customers available online at
www.peavey.com.cn/warranty
or use the QR tag below



Features and specifications subject to change without notice.

Peavey Electronics Corporation • Room No.401A-1, Haijing Plaza Building, No.18, Taizi Road, Shekou, Nanshan District,
Shenzhen, Guangdong Province, China • 020 -39974086 • www.peavey.com.cn



Logo referenced in Directive 2002/96/EC Annex IV
(OJ(L)37/38, 13.02.03 and defined in EN 50419: 2005
The bar is the symbol for marking of new waste and
is applied only to equipment manufactured after
13 August 2005

A